
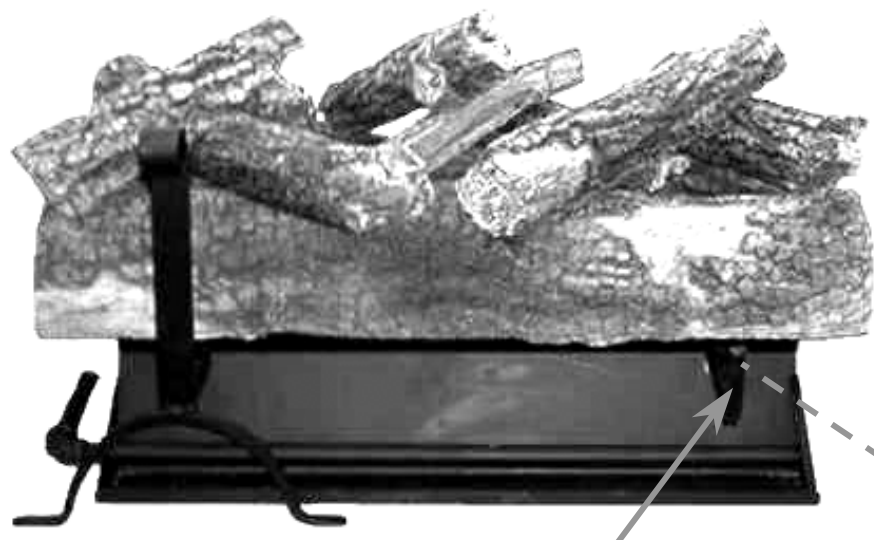


HEATMASTER®
CLO-30 Log Placement Instructions

Charleston Live Oak
 Canyon Live Oak


NOTICE
 Leave these instructions with the manual accompanying the burner system for future reference.

DO NOT DISCARD

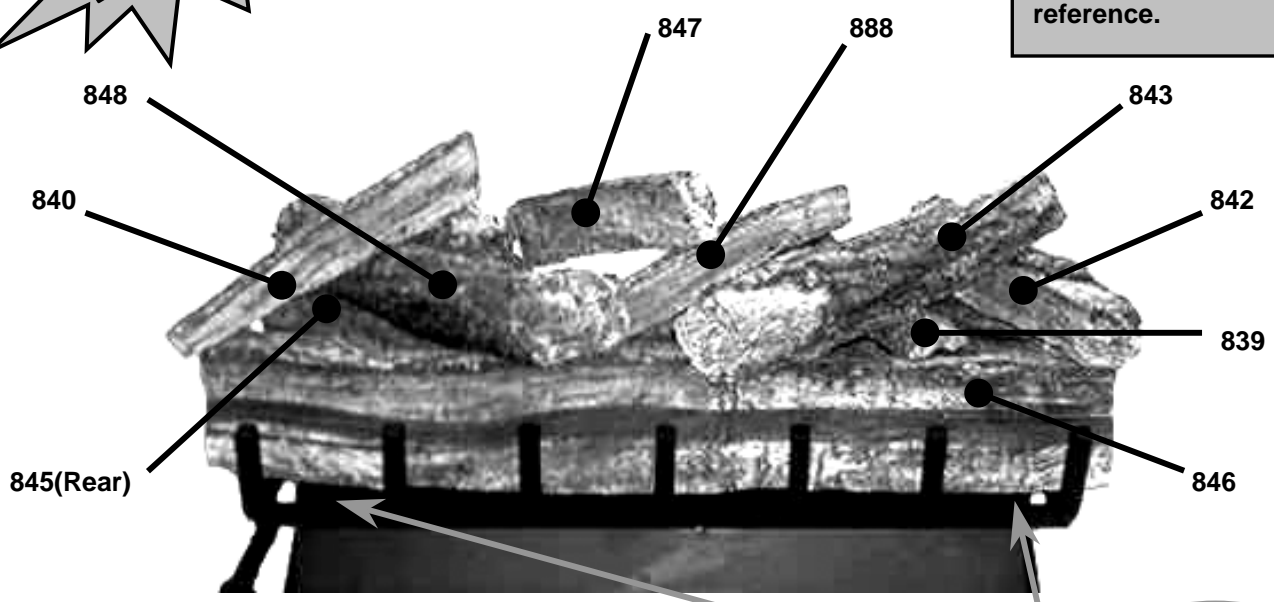

Andiron Support

WARNING:
 Log Risers MUST be installed to ensure safe operation.*

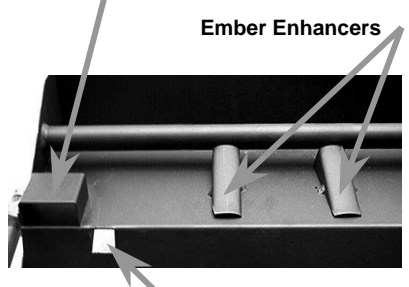

Ember Enhancers

Insert Grate OR Andiron Support

- ◆ CLO Log sets are designed for multiple configurations. Consult with the consumer before beginning installation. The above placement diagrams depict two options. In addition to the above, the installer may reverse the log arrangements on the grate or andirons. The arrangement of the top logs is a matter of the installer's choice.
- ◆ Carefully read and understand the Installation and Operating Instruction Manual accompanying the SBS burner system.
- ◆ The decision to use the grate or andiron must be made prior to placing logs. Leave the unused item with the customer for future use.
- ◆ Place Risers before installing media. *Log Risers **MUST** be installed to avoid delayed ignition on the lower burner.
- ◆ Keep Ember Enhancer tips clear of sand (Nat Gas) or Vermiculite (LP Gas).
- ◆ Use the rock wool embers to disperse the flames under top log. Ensure the lower burner does not delay when unit is lit. (Note: The lower burner will not light unless all media has been installed according to the Installation Manual accompanying the SBS burner system.)

WARNING: FAILURE TO POSITION THE PARTS IN ACCORDANCE WITH THESE INSTRUCTIONS OR FAILURE TO USE ONLY PARTS SPECIFICALLY APPROVED WITH THIS APPLIANCE MAY RESULT IN PROPERTY DAMAGE OR PERSONAL INJURY.